

F-PAP


STANDARD PLAIN FILM

F-PAP is a transparent BOPET film. The film is one side Corona Treated with one side Untreated or both sides Untreated.

KEY FEATURES:

- Very Good gloss & clarity
- Corona treatment improves bonding
- Excellent surface & good handling properties
- Excellent dimensional stability & machinability
- Specially designed for Form, Fill, & Seal machines
- Eco friendly characteristics

FILM STRUCTURE

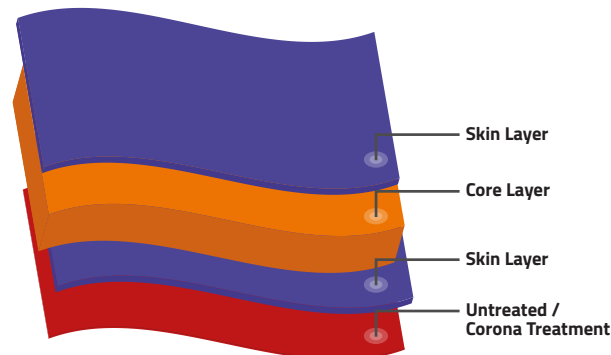

APPLICATION:

- Flexible packaging
- Solvent & Water base coating

PROPERTIES		TEST METHOD	UNIT	TYPICAL VALUES														
THICKNESS		Internal	Micron	8	9	10	11	12	15	18	19	23	30	36	50	55	60	75
			(Gauge)	32	36	40	44	48	60	72	76	92	120	144	200	220	240	300
YIELD		Internal	m² / kg	89.28	79.36	71.42	64.93	59.52	47.62	39.68	37.59	31.05	23.80	19.84	14.28	12.98	11.9	9.52
			in² /lb	62901	55912	50318	45745	41934	33550	27942	26483	21876	16768	13978	10060	9145	8384	6707
SURFACE TENSION (min) # (Corona Treated surface)		ASTM D-2578	dyne/cm	52														
COF (max) (Untreated to Corona Treated) (Untreated to Untreated)		ASTM D-1894	-	0.55	0.55	0.55	0.50	0.50	0.50	0.50	0.50	0.50	0.45	0.45	0.45	0.45	0.45	0.45
				0.50	0.50	0.50	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.40	0.40	0.40	0.40	0.40
HAZE (max)		ASTM D-1003	%	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.5	4.5	5.0	5.5	5.5	6.0	7.0
TENSILE STRENGTH AT BREAK (min)	MD	ASTM D-882	kg/cm²	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1750	1750	1750	1700	1700
	TD			2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
	MD		(Psi)	27000	27000	27000	27000	27000	27000	27000	27000	27000	27000	25000	25000	25000	24200	24200
	TD			28500	28500	28500	28500	28500	28500	28500	28500	28500	28500	28500	28500	28500	28500	28500
ELONGATION AT BREAK (min)	MD	ASTM D-882	%	90	90	100	100	105	105	110	110	115	120	120	125	125	130	130
	TD			80	80	80	85	85	85	85	85	90	90	90	95	100	100	100
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	MD	ASTM D-1204	%	3.0														
	TD			1.0														
WVTR (38°C & 90% RH) (typical)		ASTM F-1249	gm/m²/day	50	50	50	45	45	40	35	35	30	25	20	16	14	10	8
			(gm/100 in²/day)	3.2	3.2	3.2	2.9	2.9	2.6	2.3	2.3	2.0	1.6	1.3	1.0	0.9	0.6	0.5
OTR (23°C & 0% RH) (typical)		ASTM D-3985	cc/m²/day	155	155	155	130	130	110	90	90	80	75	70	45	40	36	32
			(cc/100 in²/day)	10.1	10.1	10.1	8.5	8.5	7.1	5.8	5.8	5.2	4.8	4.5	2.9	2.6	2.3	2.1

The inherent surface tension of the untreated side of any PET film is a minimum of 42 dyne/cm.

STORAGE & HANDLING

SELEXIBLE needs to be stored in a warehouse below 35°C (95°F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions, SELEXIBLE is suitable for use within 270 days from the date of shipment.

FOOD CONTACT

SELEXIBLE complies with EU and FDA regulations on plastic materials used for food grade applications. Specific documents and SDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Selexible provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Selexible reserves the right to change the technical data sheet at any time without prior notice.



Manufacturing Facilities at No. 16
Fengxiang Rd, Wujin District,
Changzhou City, Jiangsu, China
✉ sale@selexible.cn
www.selexibleplastic.com