

DATA SHEET OF PET SHEETS AND FILMS

Product Specifications

Product name PET Sheet, Polyethylene Terephthalate Sheet, PET Rollstock, Polyester Sheet, Rigid PET Film.

Product Category APET, PETG, GAG, RPET, PET/EVOH/PE, PET/EVOH/PET, PET/PE, etc.

Shape Roll/Sheet

Thickness 0.15~8.0MM

Width 250~2000MM

Quality Virgin/Recycled

PET Roll Diameter ≤38 inch

Die Cutting Size A2, A3, A4 or customized according to requirements.

Packing PE film inside + kraft outside+pallet (paper tube diameter: 76mm, thickness: 10mm)


Color Clear, White, Blue, Brown, Pink, Green, Yellow or Customized.

Performance Anti-fog, ESD (Anti-static, Conductive, Static dissipative), Corona, Printing, Coating, High impact, EVOH high barrier, Waterproof, Oil-proof, Anti-UV, etc.

Processing technology Thermoforming Vacuum Blister Forming, Die Cutting.

Hardness Rigid/Semi-rigid

Chemical structure of PET material

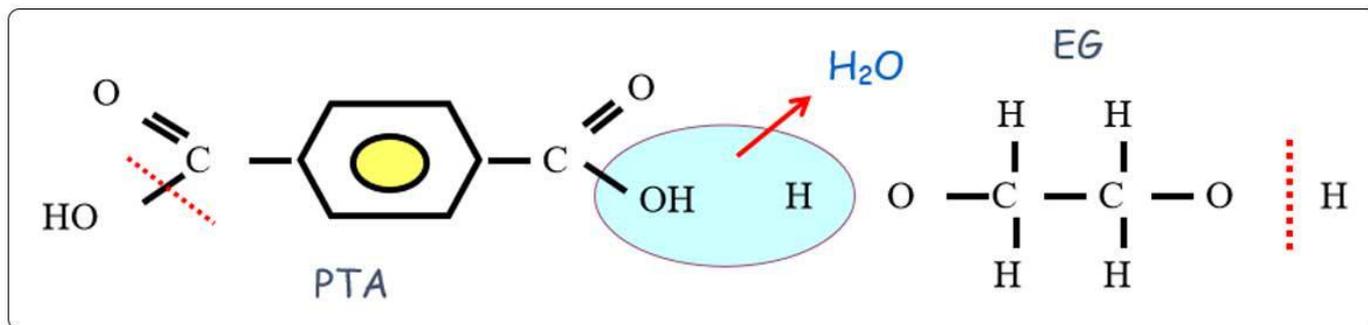

Physical and Chemical Properties

| | |
|-----------------------|--------------|
| Water absorption | 0.06%~0.129% |
| Impact strength | 64.1~128J/m |
| Rockwell hardness | M 90~95 |
| Elongation | 1.8%~2.7% |
| Melting point | 250~255°C |
| Operating temperature | -100~120°C |
| Flexural strength | 148~310MPa |

[Jiangsu Selexible Industrial Co., Ltd.](#)

E-mail: sale@selexible.cn

Add: No.16 Fengxiang Rd, Wujin District, Changzhou City, Jiangsu, China

Zip code: 213166

Cel/Wechat/WhatsApp: [+86-15600580287](tel:+86-15600580287)